
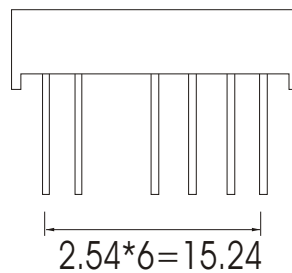





## KT10301FBOB

### Features

- 0.30 inch digit height
- Low power requirement
- I.C. Compatible
- Easy assembly
- RoHs compliant
- Wide viewing angle
- End stack able
- Gray surface
- White segments
- Common Cathode

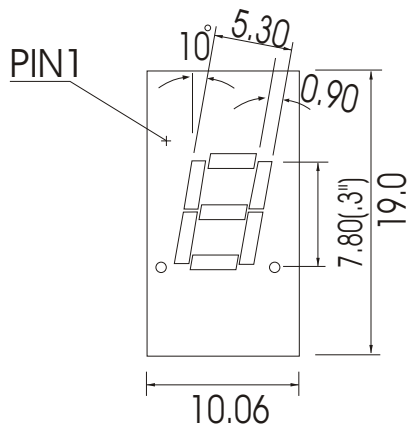

## CODE F

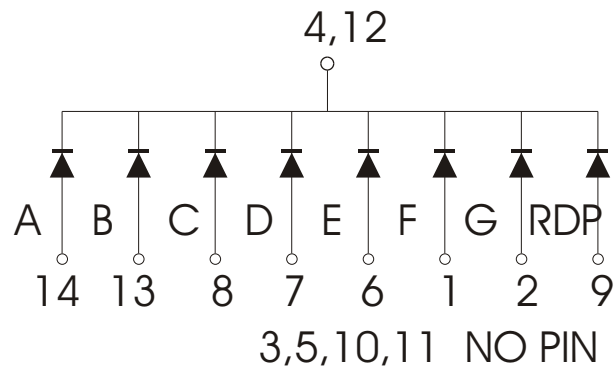

Notes: 1. All dimensions are in millimeter (inches), tolerance is 0.25mm unless otherwise noted.  
2. Specifications are subject to change without notice.

### Code:B Super Bright Red (AlGaInP)

| Parameter  | Symbol           | Condition        | Min. | Typ. | Max. | Unit |
|--|------------------|------------------|------|------|------|------|
| Forward Voltage (Per dice)   | Vf               | If=20mA          | 1.70 |      | 2.30 | V    |
| Reverse Voltage (Per dice)   | Vr               | Ir=10uA          |      | 5    |      | V    |
| Luminous Intensity (Per dice)  | Iv               | If=20mA          |      | 20   |      | mcd  |
| Spectrum Width Of Half Value   | $\Delta\lambda$  | If=20mA          |      | 22   |      | nm   |
| Wavelength   | D $\lambda$      | If=20mA          |      | 642  |      | nm   |
| Peak Forward Current (Per dice)<br>1/10 Duty Cycle,0.1ms Pulse       | I <sub>fp</sub>  |                  | 70   |      |      | mA   |
| Operating Temperature Range  | T <sub>opr</sub> | - 35 °C to 85 °C |      |      |      |      |
| Storage Temperature Range  | T <sub>stg</sub> | - 35 °C to 85 °C |      |      |      |      |
| Solder Temperature 1.5mm below seating plane for 3 Seconds at 260 °C |                  |                  |      |      |      |      |

Absolute Maximum Rating at Ta=25°C

Fig.1



Fig.2

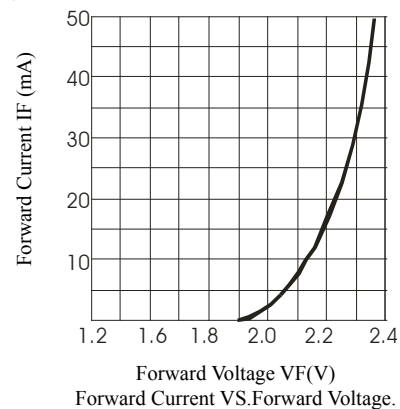


Fig.3

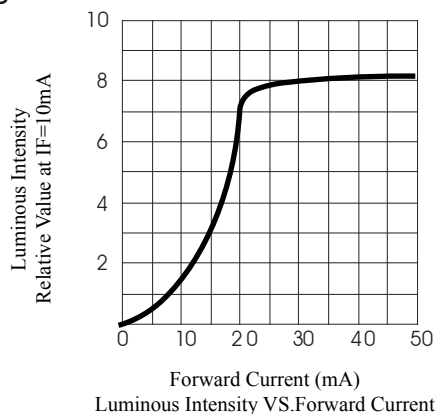


Fig.4



### Wave Soldering for Lead-Free Through-hole LED



1.5mm below package base

|                    |                     |
|--------------------|---------------------|
| Solder Temperature | 260°C for 5 Seconds |
|--------------------|---------------------|

### Lead-free SMT process



|                         |                     |
|-------------------------|---------------------|
| Lead solder Temperature | 235°C for 5 Seconds |
|-------------------------|---------------------|

Notes: Recommend the wave temperature max. 235 °C.

Do not apply stress on the epoxy when temperature over 80 °C.

No more than once.