
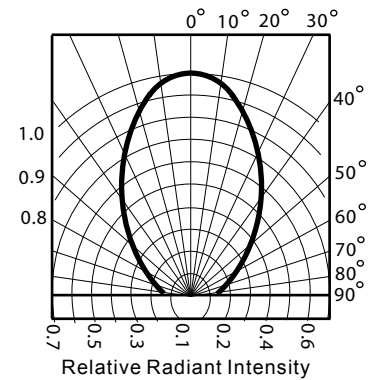
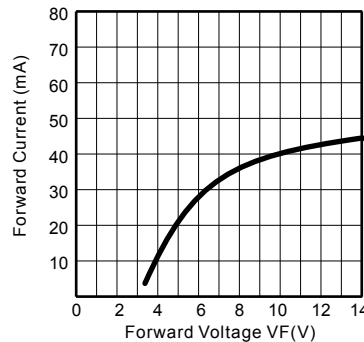
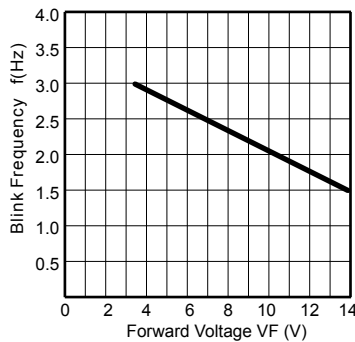
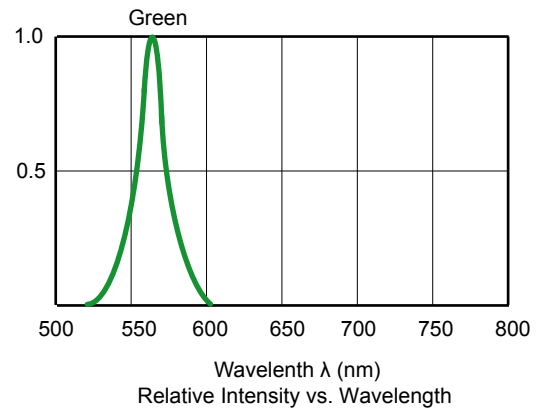


KTB03JCI

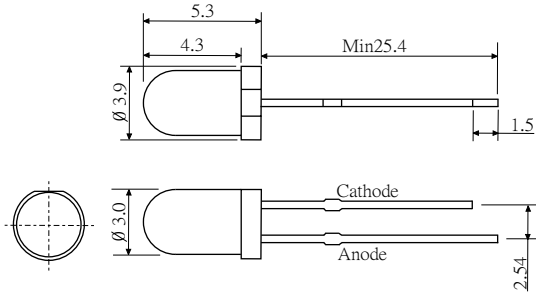

Absolute Maximum Ratings:

Parameter	Maximum Rating	Unit
Peak Forward Current	120	mA
Continuous Forward Current	30	mA
Operating temperature Range	-20°C + 75°C	
Storage Temperature Range	-40°C + 100°C	
Lead Soldering Temperature	260°C for 5 seconds	

- * 3mm with Green Dice with built in blinking I.C.
- * Encapsulated with Water Clear package.
- * long leads.
- * Blinking time 1/2 Seconds.

Electre-Optical Characterature (Ta=25°C)

Parameter Radiant	Test Condition	Symbol	Min.	Typ.	Max.	Unit
Forward Voltage	If=10mA	Vf	1.9	2.1	2.4	V
Reverse Current	Vr=5V	Ir			10	uA
Luminous Intensity	If=10mA	Iv	500	700	900	mcd
Spectral Bandwidth	If=10mA	$\Delta\lambda$				nm
Wavelength	If=10mA	λ_p		568	570	nm
		λ_d				nm
Half View Angle	If=10mA	2 θ 1/2		30		deg